


# Product Profile

## RUS Slurry Pump

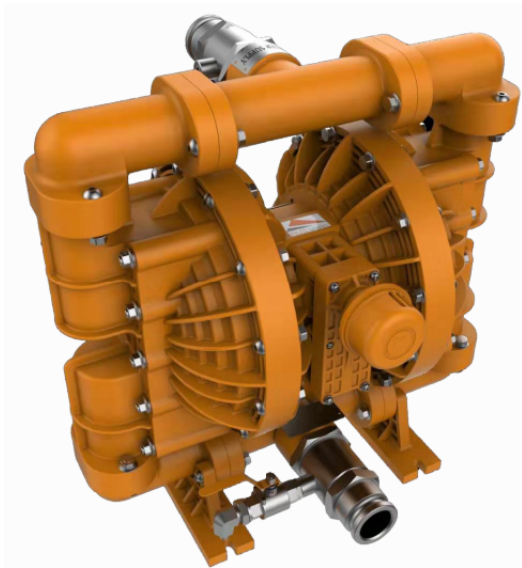

### General Specifications

Specifications	RWP-200
Rated Air Pressure (psi)	72.5
Recommended Operation Air Supply (psi)	50-110
Rated Flow (L/min)	200
Air consumption (m3/min)	1.5-3
Lift rates (m)	30
Maximum suction (m)	7
Operating temperature (°C)	0~+70
Maximum particle diameter (mm)	Ø 3
weight (kg)	31
noise (dBA)	<85
Applicable medium	Water, oil

BQG and Rwp series pneumatic diaphragm pump for coal mine, rugged robust design, manufactured from light weight materials, low energy consumption, no lubrication required, and corrosion resistance.

Manufactured from FRAS materials.

Static seals, no leakage point.

High liquid flow rates.

Little maintenance required.

Accessories include, hosing, fittings, automatic float switches, filters and strainers.

## Contact

Head Office: 5 Montore Road, Minto, NSW 2566 Australia.

Postal Address: PO Box 322, Minto, NSW 2566

Phone: (02) 8796 9800

Fax: (02) 9824 8158

Email: [Russales@rusmining.com.au](mailto:Russales@rusmining.com.au)